




XB01: Optional
Top-of-Panel Closure Flashing.
Used at panel termination beneath
coping, window sills, and other flashings.
Available in 10' Lengths.

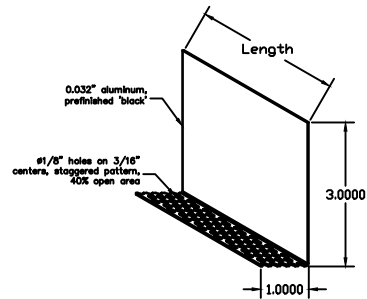

XB02: Optional
Termination Closure Flashing.
Used to terminate panel
system at sill conditions.
Available in 10' Lengths.

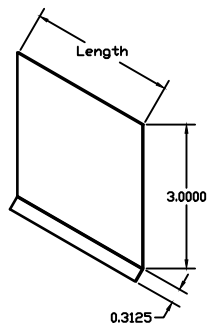

XB03: Optional
Horizontal Joint Drip Flashing.
For use as closure at horizontal
panel joints throughout the system.
Available in 10' Lengths.

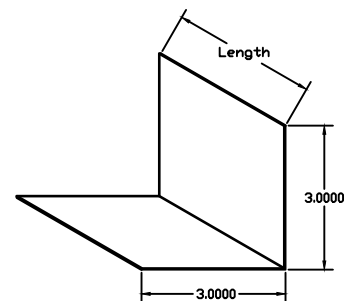


XB04: Optional
Inside Corner Closure Flashing.
Used for closure at panel
to panel inside corners.
Available in 10' Lengths.


01

DET

Exposed System Parts Catalog Page

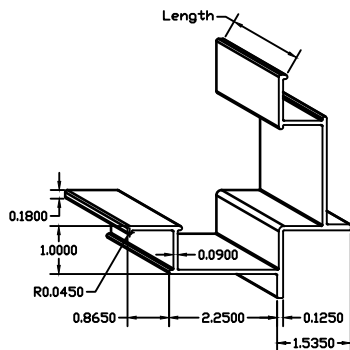

XCB: Optional
Extruded aluminum closure furring support.
For use at outside corner conditions.
Available in 20' Lengths.

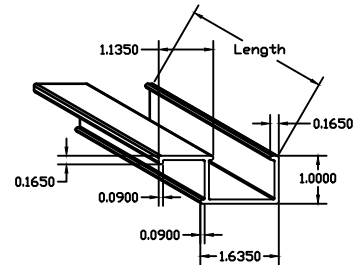

XEB:
Extruded aluminum closure furring support.
For use at outside & inside corner;
plus, closure & jamb conditions.
Available in 20' Lengths.




XBB:
Grommet Washer



Visual of stainless
steel fastener with
XBB




Exposed System Parts Catalog Page

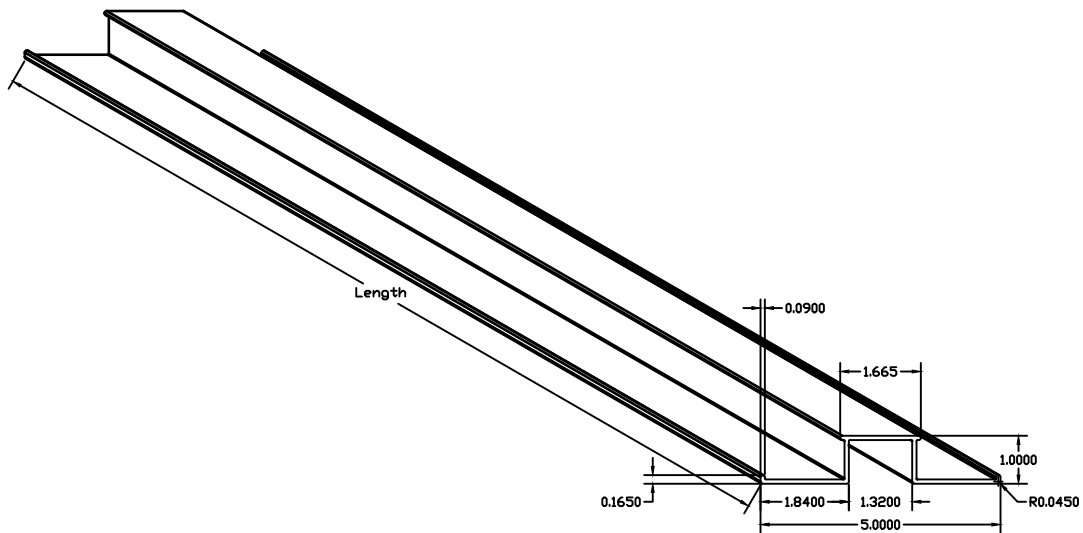


XHB:
Extruded aluminum channel furring.
For use at vertical joint locations.
Available in 20' Lengths.

03
DET

Exposed System Parts Catalog Page

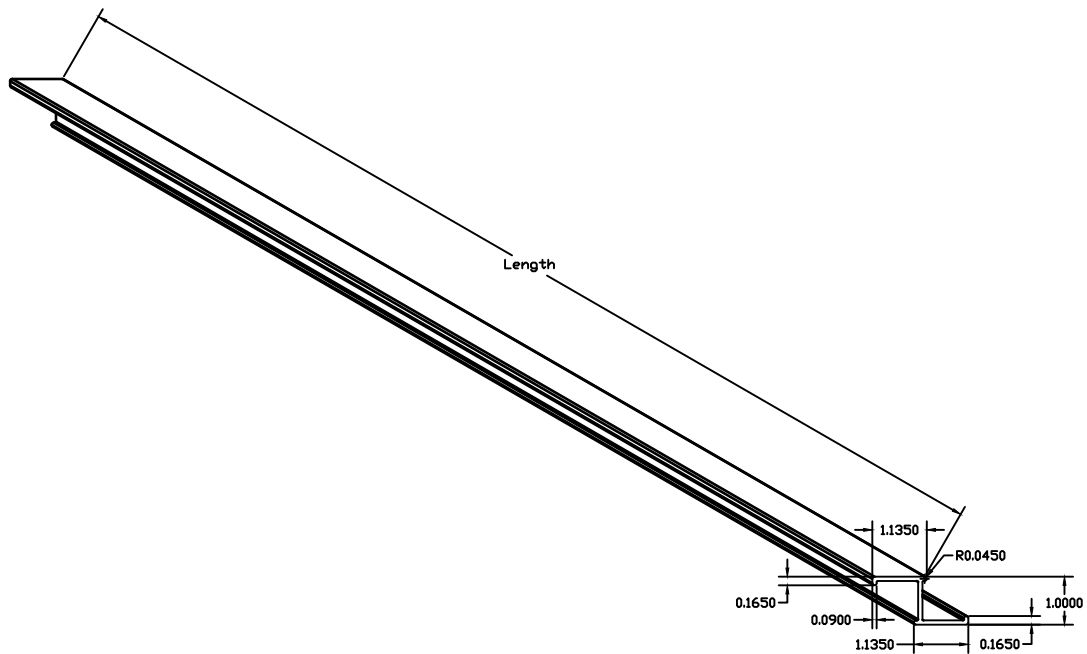

XZB:
Extruded aluminum zee furring.
For use at field fastener conditions.
Available in 20' Lengths



Exposed System Parts Catalog Page



FIBERESIN EXPOSED FASTENER
PARTS CATALOG

04
05-03-21