



EXTERIOR CONCEALED FASTENER (CF) SYSTEM OVERVIEW


Panel 1: 4' x 8'

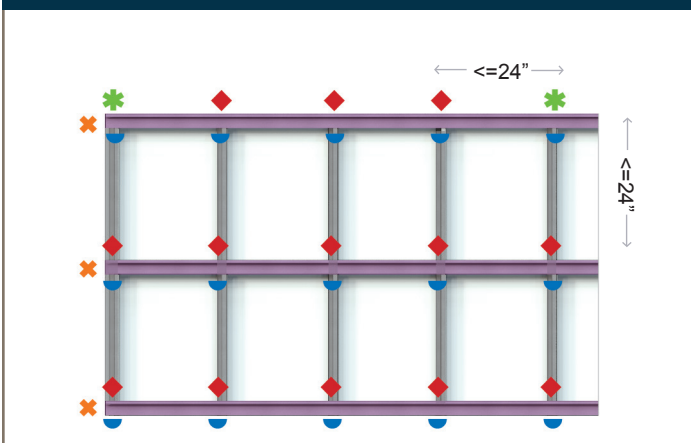

Panel 2: 24" x 8'

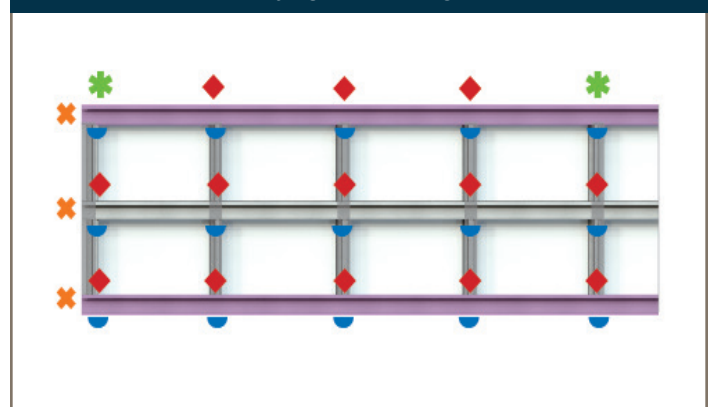


Panel 3: 4' x 4'

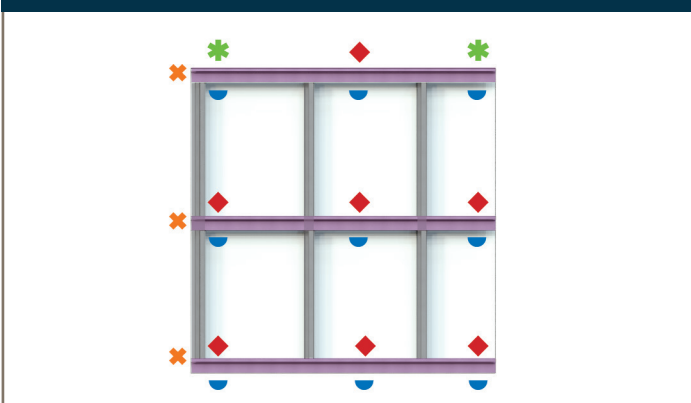


Support Points Per Panel

- Minimum of 3 supports, vertically and horizontally are required except for planks under 20"
- Distance between the edge mounting points and the panel edges must be 1-2"
- The actual number of fastening points and distance between supports must be verified by a building professional for wind load as per load building code


Panel 4: 16" x 8'

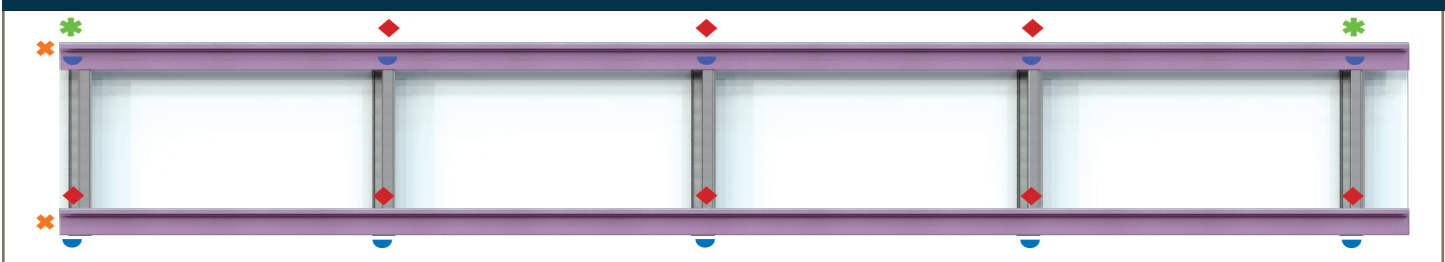


Concealed Fastener Products




EFZB




CFRM




CFB01



CFCA
Requires CFF5



CFCS
Requires CFF5



CFF5
Use 2x CFF5 per CFCA and CFCS to attach clip to panel.