Use CFCAB Adjustable Panel
Attachment Clip Bolt to Adjust Panel for
Level in Top Corners of Panels

Use CFCSS Adjustable Panel Attachment Clip Set Screw to
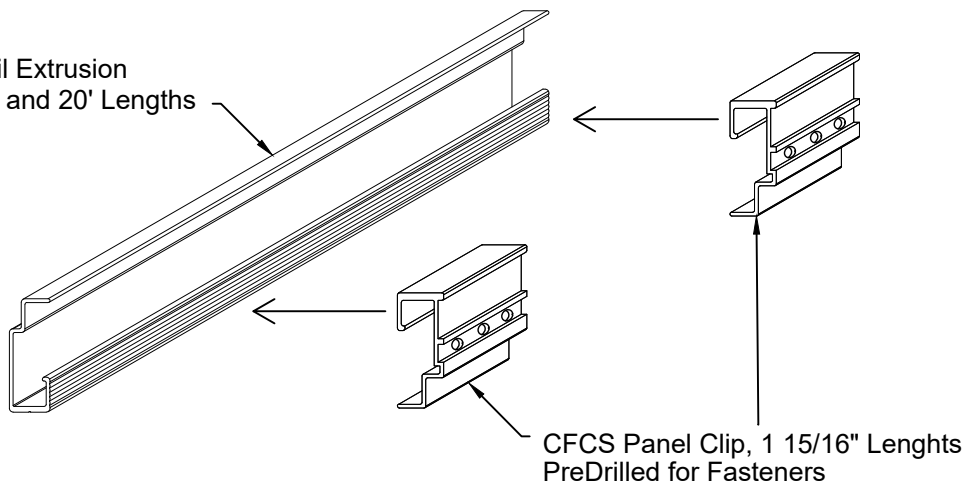Secure Clip to Rail in Top Corner of Panels, or Per Seismic
Requirements from Stamped Calculations

CFRM:
Continuous Rail Extrusion
Available in 10' and 20' Lengths

CFCS Panel Clip, 1 15/16" Lenghts
PreDrilled for Fasteners

01
DET

CF System Parts Catalog Page

1'-15/16"

Ø0.250" Clip
Adjustment Hole

Ø0.276" Clip
Panel Attachment Holes (2)
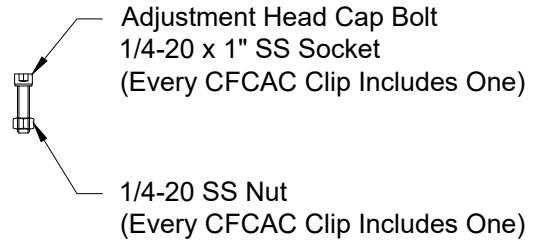
Ø0.276" Clip
Panel Attachment Holes (2)
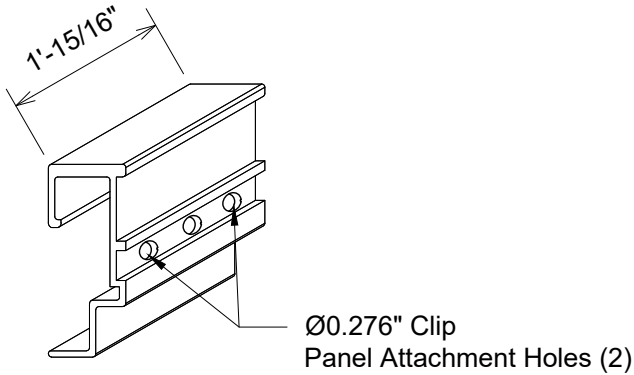
CFCS:
Panel Clip Extrusion
with Stonewood Panel Attachment Holes
and without CFRM Adjustment Holes
Spaced per Engineering Requirements
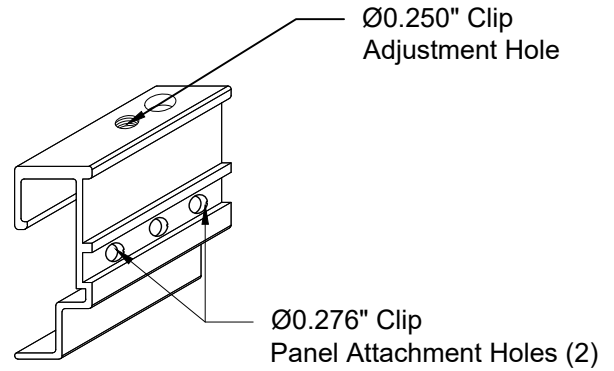
CFCAC:
Panel Clip Extrusion
with Stonewood Panel Attachment Holes
and CFRM Adjustment Holes
Required at Upper Right and Left Corners of Panels

Adjustment Head Cap Bolt
1/4-20 x 1" SS Socket
(Every CFCAC Clip Includes One)

1/4-20 SS Nut
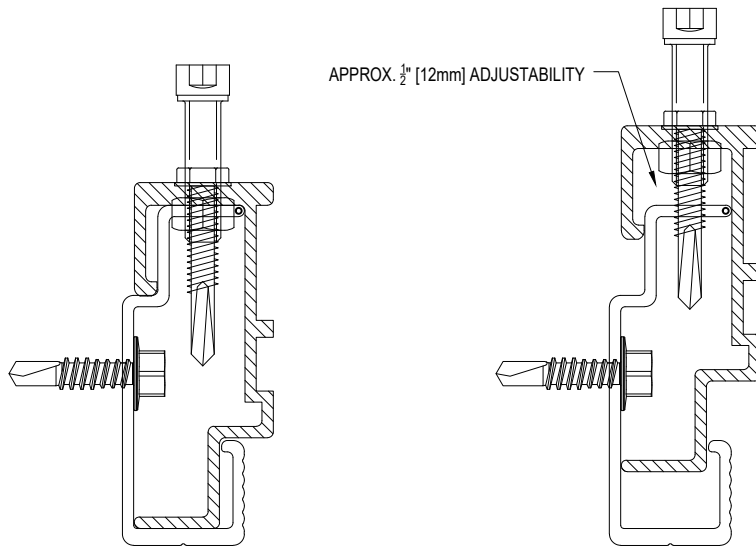(Every CFCAC Clip Includes One)

CFF5:
Clip Fastener, 2 per Panel Clip (CFCS & CFCAC)
Used to Attach Clips to Stonewood Panels
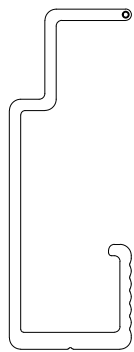
Adjustment Hold-Down Fastener
CFCSS Adjustable Panel Attachment Clip Set Screw
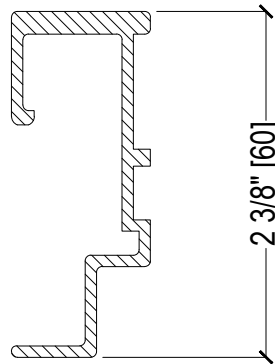(Every CFCA Clip Includes One)

02 | CF System Parts Catalog Page

DET

STONEWOOD
ARCHITECTURAL PANELS

Standard Components

APPROX. $\frac{1}{2}$" [12mm] ADJUSTABILITY

Assembled CFRM Carrier Rail And CFCAC Clip & Adjustability

2 3/8" [60]

CFRM Horizontal Panel Rail

CFCAC Panel Clip, 1 15/16" Lenghts

03
DET

CF System Parts Catalog Page

$\frac{7}{8}$"

$2\frac{5}{8}$" $\frac{9}{16}$"

$\frac{1}{32}$"

$\frac{3}{8}$"

2"

Continuous
VHB Tape Included
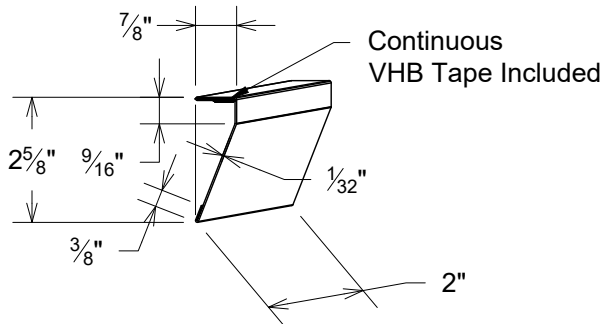
CFB01: Optional
Rail Cover, 0.032" Aluminum, Prefinished Black
Provided in 2" Lengths
Applied to CFRM Panel Rails at Vertical Joints
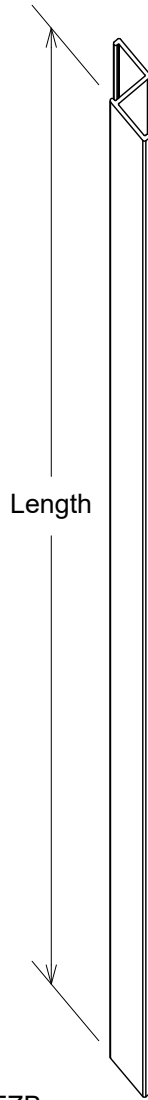
Length

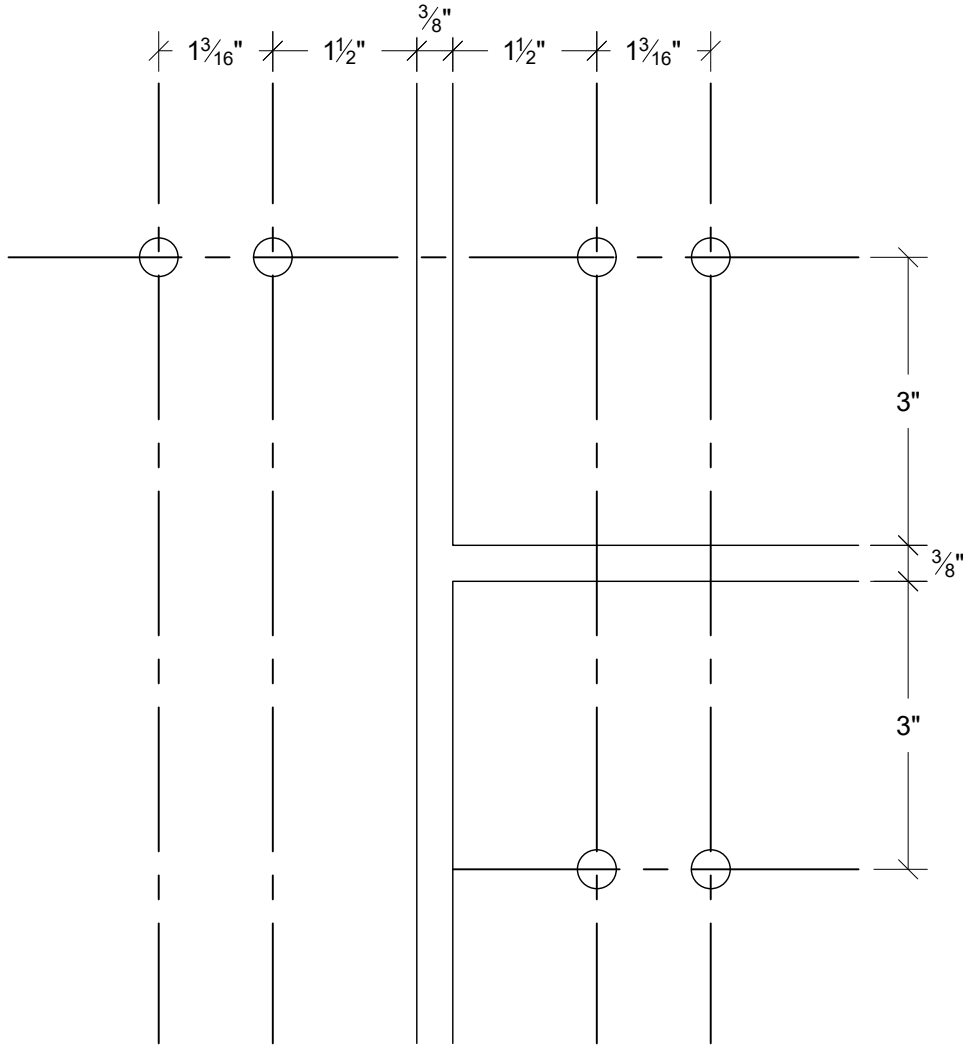EFZB:
Continuous 'Z' Extrusion, Prefinished Black
Available in 10' and 20' Lengths

04
DET

CF System Parts Catalog Page

STONEWOOD
ARCHITECTURAL PANELS
www.stonewoodpanels.com
262-567-4427

FIBERESIN CF
PARTS CATALOG

04
05-18-2020

DRILLING KEY FOR BACK FASTENED PARTS:
HOLE DIAMETER = 5mm or $\frac{13}{64}$"Ø Hole
DRILL HOLE DEPTH = 8mm OR $\frac{21}{64}$"

$\frac{3}{8}$"

$1\frac{3}{16}$" $1\frac{1}{2}$" $1\frac{1}{2}$" $1\frac{3}{16}$"

3"

$\frac{3}{8}$"

3"

05   CF System Drilling Key
DET